

POLYNIL®

PA 6.6 RESINS

EN


- DESIGNED FOR COMPOUNDING, INJECTION AND EXTRUSION
- LARGE VISCOSITY RANGE
- UL LISTED
- SUITABLE FOR CONTACT WITH FOOD AND POTABLE WATER

IT

- PA 6.6 PER COMPOUND, STAMPAGGIO ED ESTRUSIONE
- AMPIA GAMMA DI VISCOSITÀ
- CERTIFICAZIONI UL
- ADATTI AL CONTATTO CON ALIMENTI E ACQUA POTABILE

DE

- ENTWICKELT FÜR COMPOUNDIERUNG, SPRITZGUSS UND EXTRUSION
- UMFANGREICHE VISKOSITÄTSBANDBREITE
- UL GELISTET
- GEEIGNET FÜR DEN KONTAKT MIT LEBENSMITTELN UND TRINKWASSER

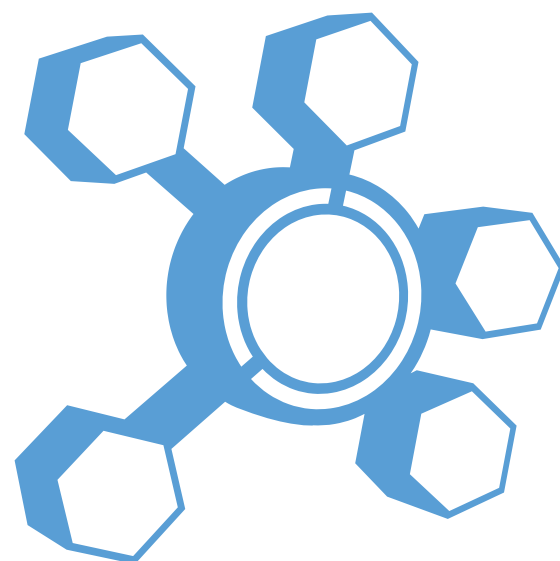

POLYNIL®

EXAMPLES OF MAIN APPLICATIONS

ESEMPI DELLE PRINCIPALI APPLICAZIONI

ANWENDUNGSBEISPIELE

CAR DOOR HINGES

CERNIERE PORTIERA AUTO

AUTOTÜRSCHARNIER



GRASS CUTTER STRING

FILO PER DECESPUGLIATORE

RASENTRIMMERSCHNUR



KITCHEN TOOLS

UTENSILI DA CUCINA

KÜCHENWERKZEUGE



PA6.6 UNFILLED GRADES		PA6.6 UNREINFORCED FOR INJECTION MOLDING									PA6.6 FOR COMPOUNDING AND ALLOYING								
TYPE	POLYNIL P50 FI	POLYNIL P50 FIHS	POLYNIL P50 FIBK	POLYNIL P50 N	POLYNIL P50 FL	POLYNIL P50 L	POLYNIL P50 LHS	POLYNIL P240 L	POLYNIL P240 LH SV	POLYNIL C60L	POLYNIL P36/4	POLYNIL P40/4	POLYNIL P43/4	POLYNIL P50/4	POLYNIL P50 H	POLYNIL C3588	POLYNIL C50	POLYNIL P50 EF/4	
PROPERTIES	INTERNALLY LUBRICATED, 2.7 VISCOSITY, FDA COMPLIANT	INTERNALLY LUBRICATED, HEAT STABILIZED, 2.7 VISCOSITY	INTERNALLY LUBRICATED, BLACK, 2.7 VISCOSITY	NUCLEATED, FAST CYCLING, 2.7 VISCOSITY	NUCLEATED, LUBRICATED, 2.7 VISCOSITY	LUBRICATED, 2.7 VISCOSITY, FDA COMPLIANT	LUBRICATED, HEAT STABILIZED, 2.7 VISCOSITY	WEAR RESISTANT, 5 VISCOSITY, FDA COMPLIANT	WEAR RESISTANT, HEAT STABILIZED, 5 VISCOSITY	PA6.6/6 COPOLYMER, 2.9 VISCOSITY, FDA COMPLIANT	2.4 VISCOSITY, FDA COMPLIANT, MOISTURE <0.4%	2.5 VISCOSITY, FDA COMPLIANT, MOISTURE <0.4%	2.6 VISCOSITY, FDA COMPLIANT, MOISTURE <0.4%	2.7 VISCOSITY, FDA COMPLIANT, MOISTURE <0.4%	HIGH AMINE, 2.7 VISCOSITY, FDA COMPLIANT, MOISTURE <0.2%	PA6.6/6 HIGH FLOW, 2.4 VISCOSITY, FDA COMPLIANT	PA6.6/6, 2.7 VISCOSITY, FDA COMPLIANT	PA6.6, EXTRA FLOW FOR LGF, FDA COMPLIANT, MOISTURE <0.4%	
DENSITY 23°Cg/cm³ ISO 1183	1,14	1,14	1,14	1,14	1,14	1,14	1,14	1,14	1,14	1,13	1,14	1,14	1,14	1,14	1,14	1,13	1,13	1,14	
MOULD SHRINKAGE (PARALLEL) 23°C % ISO 294-4	1,4	1,4	1,4	1	1	1,3	1,4	1,4	1,4	1,5	—	—	—	—	—	—	—	—	
MOULD SHRINKAGE (NORMAL) 23°C % ISO 294-4	1,6	1,6	1,6	1,2	1,2	1,5	1,6	1,4	1,4	1,7	—	—	—	—	—	—	—	—	
MOISTURE ABSORPTION IN WATER 23°C -12% ISO 62	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,50	
MOISTURE ABSORPTION IN WATER 23°C SATURATION % ISO 62	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	8,50	
NOTCHED IZOD IMPACT STRENGTH 23°CJ/m ISO 180/A	5,5	5,5	5,5	4,8	4,8	5,5	5,5	7	7	6	5,5	5,5	5,5	5,5	5,5	6	6	5,5	
NOTCHED IZOD IMPACT STRENGTH -30°CJ/m ISO 180/A	4,5	4,5	4,5	4,6	4,7	4,5	4,5	—	—	—	4,5	4,5	4,5	4,5	4,5	—	—	4,5	
UNNOTCHED CHARPY IMPACT STRENGTH 23°C KJ/M2 ISO 179/1EU	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	
UNNOTCHED CHARPY IMPACT STRENGTH -30°C KJ/M2 ISO 179/1EU	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	—	—	—	—	—	—	—	—	
NOTCHED CHARPY IMPACT STRENGTH 23°C KJ/M2 ISO 179/1EA	5,5	5,5	5,5	4,7	5	5,5	5,5	8	5	6,5	5,5	5,5	5,5	5,5	—	6,5	6,5	—	
NOTCHED CHARPY IMPACT STRENGTH -30°C KJ/M2 ISO 179/1EA	4,5	4,5	4,5	4	4,5	4,5	4,5	—	4	5,5	4,5	4,5	4,5	4,5	—	5,5	5,5	—	
TENSILE YIELD STRESS 23°CMPa ISO 527	83	83	83	90	90	83	83	82	84	80	81	81	81	81	81	81	81	—	
TENSILE MODULUS 23°CMPa ISO 527	3100	3100	3100	3500	3500	3100	3100	2800	2700	2900	3.100	3.100	3.100	3.100	3.100	2.500	2.500	—	
TENSILE YIELD STRAIN 23°C % ISO 527	6	6	6	5	5	6	6	—	—	8	NTBR	NTBR	NTBR	NTBR	NTBR	NTBR	NTBR	NTBR	
TENSIL STRAIN AT BREAK 23°C % ISO 527	50	50	50	30	30	50	50	100	100	80	50	50	50	50	50	80	80	—	
FLEXURAL YIELD STRESS 23°CMPaISO 178	120	120	120	120	120	120	120	120	118	110	120	120	120	120	120	110	110	120	
FLEXURAL MODULUS 23°CMPaISO 178	2900	2900	2900	3100	3100	2900	2900	2800	2700	2500	2850	2850	2850	2850	2850	2500	2500	2850	
MELTING POINT °C	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 249	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 258	APPROX 249	APPROX 249	APPROX 258	
VICAT - SOFTENING TEMPERATURE 49N °C ISO 306	240	240	240	240	240	240	240	240	240	220	240	240	240	240	240	220	220	240	
HDT - DEFLECTION TEMPERATURE UNDERLOAD 0.45N/MM2 °C ISO 75	225	225	225	238	225	225	225	225	225	210	225	225	225	225	225	210	210	—	
HDT - DEFLECTION TEMPERATURE UNDERLOAD 0.1N/MM2 °C ISO 75	72	72	72	78	78	72	72	72	72	65	72	72	72	72	72	65	65	—	
HEAT RESISTANCE - BALL TEST 125°C IEC 60309-1	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	—	
HEAT RESISTANCE - BALL TEST 165°C IEC 60309-1	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK	—	
CONTINUOUS SERVICE TEMPERATURE 2000h IEC 216	85	130	85	85	85	85	130	85	130	—	85	85	85	85	85	—	—	85	
DIELECTRIC STRENGTH 2mm KV/mmIEC60 243	18	18	18	18	18	18	18	18	18	18	18	18	18	18	18	—	—	18	
SURFACE RESISTIVITY 23°COhm/mIEC 60093	1012	1012	1012	1012	1012	1012	1012	1012	1012	1012	—	—	—	—	—	—	—	—	
VOLUME RESISTIVITY 23°COhm/mIEC 60093	1013	1013	1013	1013	1013	1013	1013	1013	1013	1013	—	—	—	—	—	—	—	—	
CTI - COMPARATIVE TRACKING INDEX (20kV SOL. A V IEC 60112	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	
OXYGEN INDEX % IEC 4589	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	—	—	28	
FLAMMABILITY RATING 3.2 (1.5mmUL 94	V2	V2	V2	V2	V2	V2	V2	HB	—	—	V2	V2	V2	V2	V2	—	—	V2	
FLAMMABILITY RATING 0.8 (0.4mmUL 94	V2	V2	V2	V2	V2	V2	V2	HB	—	—	V2	V2	V2	V2	V2	—	—	V2	
GLOW WIRE FLAMMABILITY INDEX 3.2 (300°C IEC 60695-2-12	850 (750)	850 (750)	850 (750)	850 (750)	850 (750)	850 (750)	850 (750)	850 (750)	850 (750)	—	850 (750)	850 (750)	850 (750)	850 (750)	850 (750)	—	—	850 (750)	
GLOW WIRE IGNITION TEMPERATURE 3.2 (300°C IEC 60695-2-13	750 (775)	750 (775)	750 (775)	750 (775)	750 (775)	750 (775)	750 (775)	750 (775)	750 (775)	—	750 (775)	750 (775)	750 (775)	750 (775)	750 (775)	—	—	750 (775)	
FLAMMABILITY RATING 355 X 100 30min FMVSS No.302	SE	SE	SE	SE	SE	SE	SE	—	S.E.	SE	—	—	—	—	—	—	—	—	
UL LISTED	NB = NO BRAKE																		

